

7 Parts and diagrams

- [Printer support](#)
- [Center Covers](#)
- [Electronics Module](#)
- [Right Cover](#)
- [Left Cover](#)
- [Right-Hand Assemblies](#)
- [Left-Hand Assemblies](#)
- [Carriage](#)
- [Scan-Axis Assemblies](#)
- [Drive Roller and Media-Axis Motor](#)
- [Paper Path Assemblies](#)
- [Center Guide and Pinchwheel Assembly](#)
- [Media Entry Assemblies](#)
- [Take-Up Reel assembly](#)
- [Miscellaneous parts](#)


Printer support

Number in figure	HP part number	Description	Model	Cross-reference
1	Q6651-60257	Leg Cover	All	N/A
2	CQ109-67039	Foot Assembly	All	N/A
3	Q6651-60260	Bin Assembly (Includes the Bin Support)	42-inch	N/A
4	Q6651-60259	Foot Brace Assembly	42-inch	N/A
	Q6651-60262		60-inch	N/A
5	CQ109-67040	Legs Assembly	Z6200	N/A
	F2S71-67012		Z6800, Z6600	
	2QU14-67016		Z6610, Z6810	
6	Q6651-60258	Cross-Brace Assembly	42-inch	N/A
	Q6651-60261		60-inch	N/A
7	Q6651-60264	Stand Supports	All	N/A
-	Q6651-60256	Hardware Kit (Includes screws for Legs Assembly)	All	N/A
-	F2L45-67008	X-Bars	60-inch	N/A

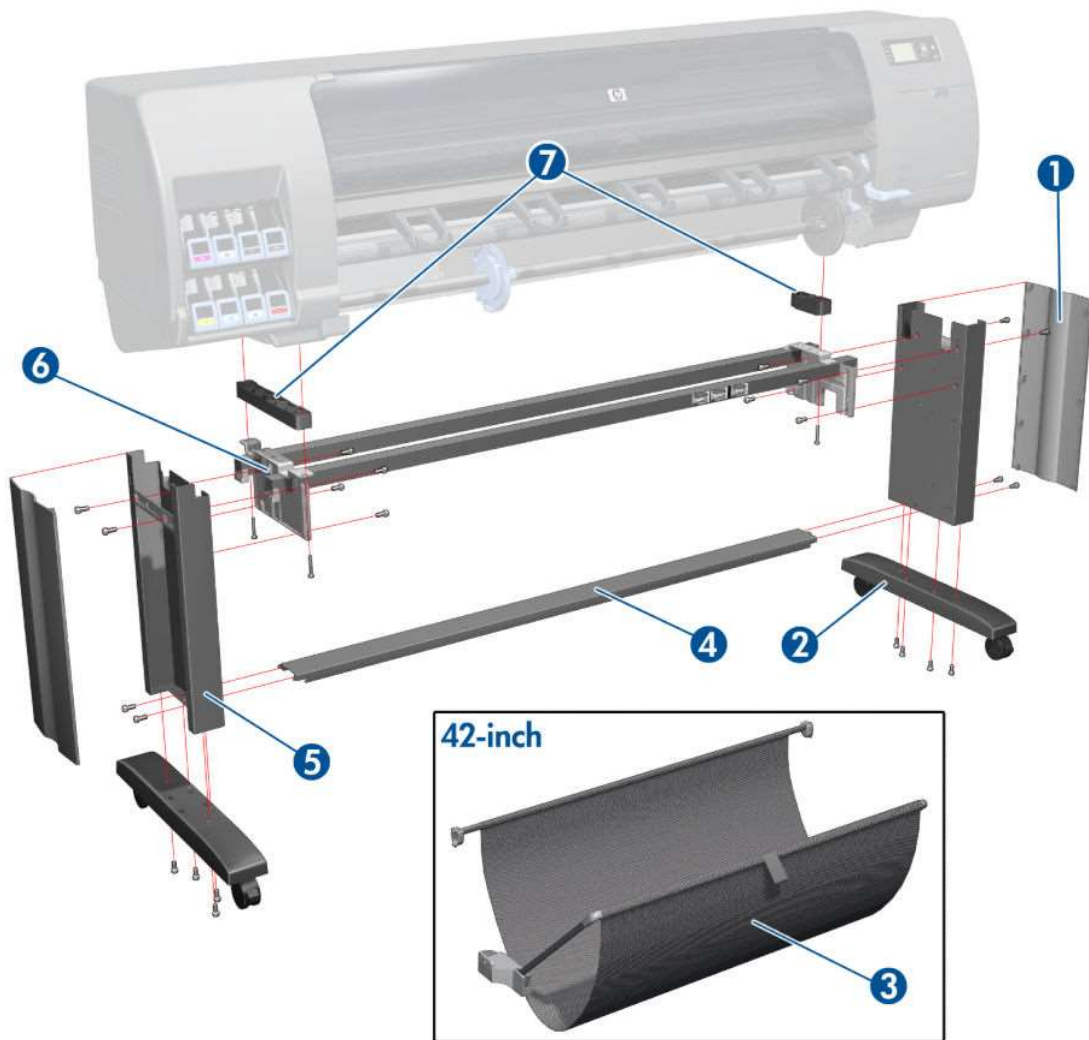


Center Covers

Number in figure	HP part number	Description	Model	Cross-reference
1	Q6651-60333	Rear Door	42-inch	Rear Door (42-inch) on page 254
	Q6652-60124		60-inch	Rear Door (60-inch) on page 256
2	Q6651-60331	Left Connector Cover	42-inch	Left Connector Cover (42-inch) on page 259
	CQ111-67005	Electronics Module Extension	60-inch	Electronics Module Extension (60-inch only) on page 260
3	CQ109-67033	Right Connector Cover	All	Right Connector Cover on page 257
4	CQ109-67013	Window Position Sensor	All	N/A
5	CQ109-67041	Window	42-inch	Window (42-inch) on page 231
	F2S71-67010		60-inch	
6	Q6651-60291	Top Cover	42-inch	Top Cover (60-inch) on page 248
	Q6652-60113		60-inch	

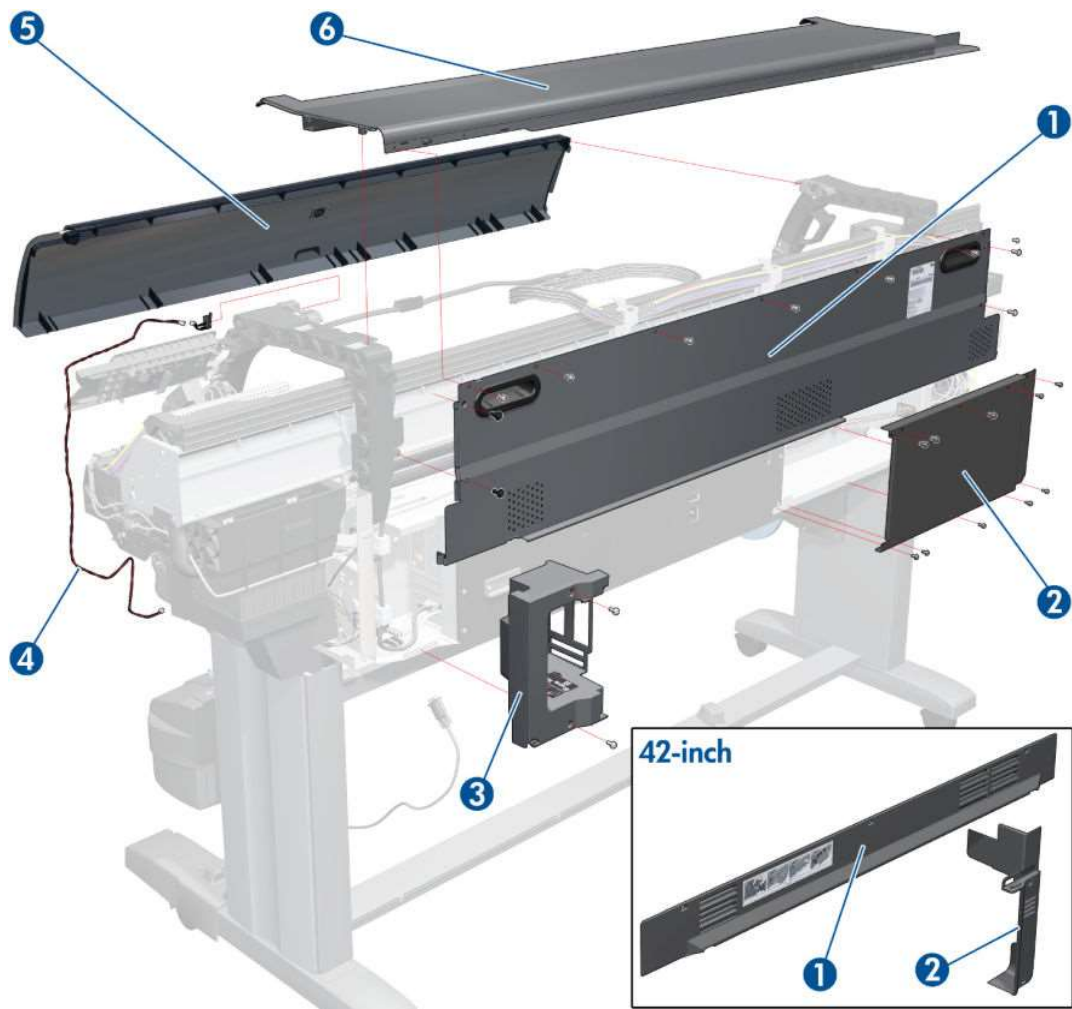

Electronics Module


Number in figure	HP part number	Description	Model	Cross-reference
1	CQ109-67029	Electronics Module Cables Kit	42-inch	N/A
	CQ111-67008		60-inch	
2	Q1273-60237	EIO to PCI Interface Card	All	EIO to PCA Interface Card on page 347
3	CQ109-67014	OMAS Controller Card	All	OMAS Controller Card on page 348
4	CQ109-67028	Main PCA	All	Main PCA on page 357
5	CQ109-67054	Formatter (includes Processor, Heatsink & Fan) (For all printers except the Z6200. For Rev B printers, the Formatter needs to be replaced together with the 11 Hard Disk Drive)	All	Formatter on page 360
6	CQ109-67012	Interconnect PCA	All	Interconnect PCA on page 346
7	CQ109-67030	Empty Electronics Module Assembly	All	N/A
8	CQ109-67026	Electronics Module Metal Parts Kit	All	N/A
9	CQ109-67006	Power Supply Unit (PSU)	All	Power Supply Unit (PSU) on page 367
10	CQ109-67035	PrintMech PCA	All	PrintMech PCA on page 371
11	CQ109-67015	Hard Disk Drive (includes Holder and screws). For Rev B printers, the Hard Disk Drive needs to be replaced together with the 5 Formatter	Z6200 (Rev A only)	Hard Disk Drive (HDD) on page 363
	F2S71-67004		Z6600 (Rev A only)	
	F2S72-67001		Z6800 (Rev A only)	
	F2S72-67006		Z6800 (Rev B only)	
	2QU14-67009		Z6810 (Rev A only)	
	2QU14-67017		Z6810 (Rev B only)	
	2QU13-67008		Z6610 (Rev A only)	
12	CQ111-67005	Ebox Extension	60-inch	
5 + 11	CQ109-67044	Encrypted Hard Disk + Formatter	Z6200 (Rev B only)	Hard Disk Drive (HDD) on page 363 Formatter on page 360

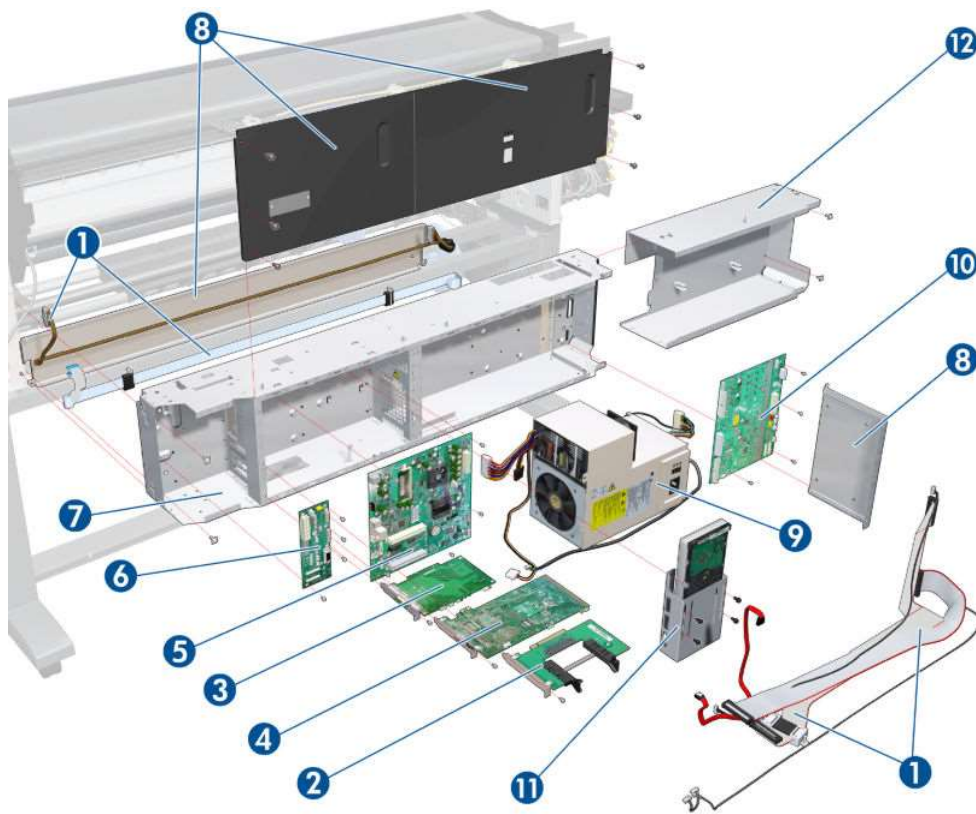

Right Cover


Number in figure	HP part number	Description	Model	Cross-reference
1	Q6651-60293	Right Cover (without Service Station Door)	All	Right Cover on page 234
2	CQ109-67031	NOTE: P/N 2QU14-67015 includes a label.	Z6200	Maintenance Cartridge Door on page 401
	F2571-67011		Z6600	
	F2572-67007		Z6800	
	2QU14-67015		All	
3	Q6651-60321	Right Trim	All	Right Trim on page 237
4	CQ109-67005	Front Panel ^a	All	Front Panel on page 264

a. Including cable and ferrite cores

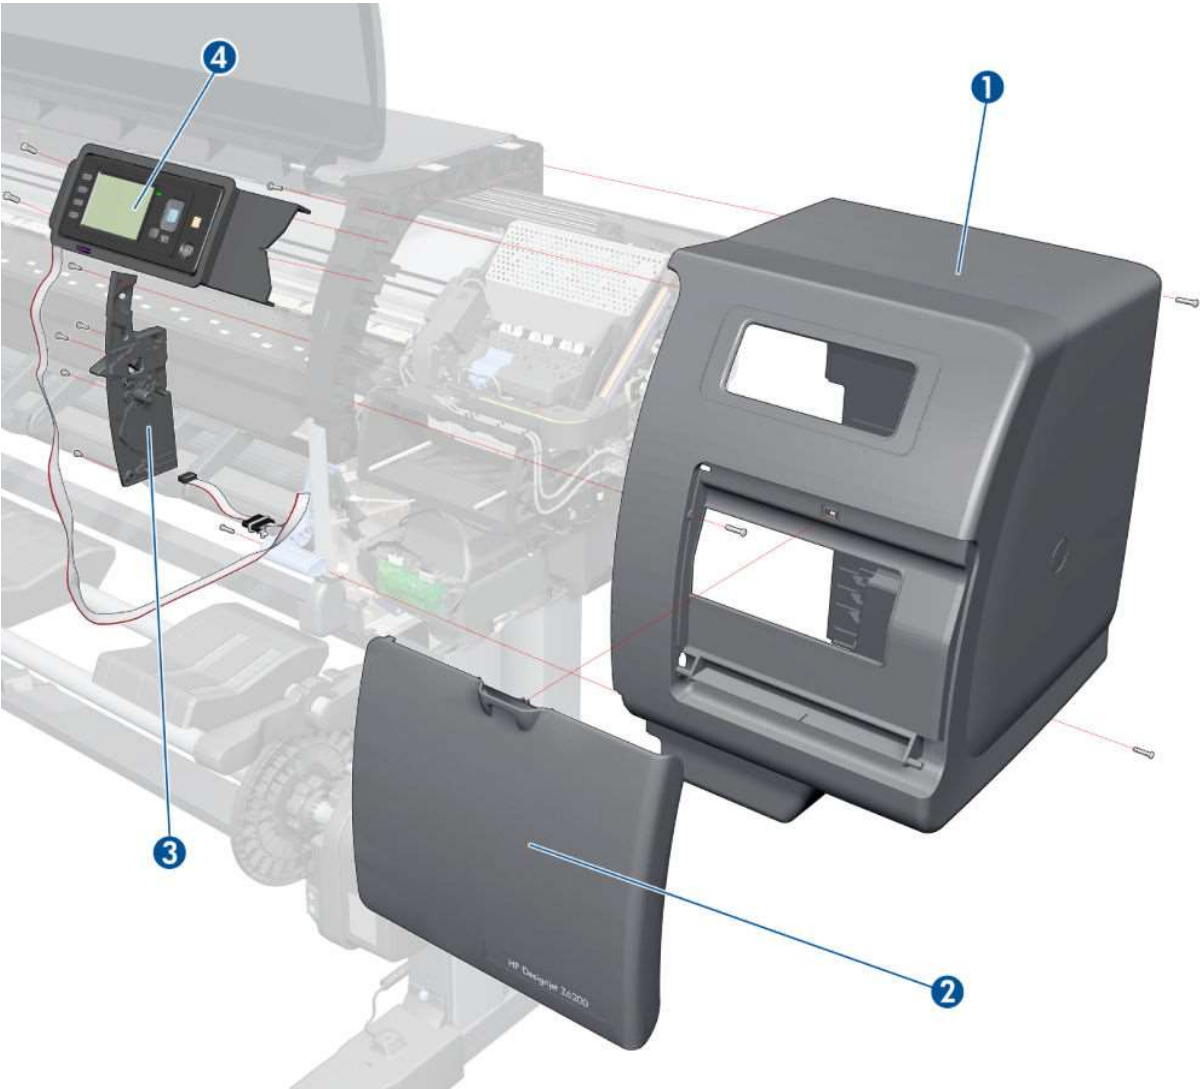


Left Cover

Number in figure	HP part number	Description	Model	Cross-reference
1	Q6651-60322	Left Trim	All	Left Trim on page 242
2	Q6651-60292	Left Cover	All	Left Cover on page 240

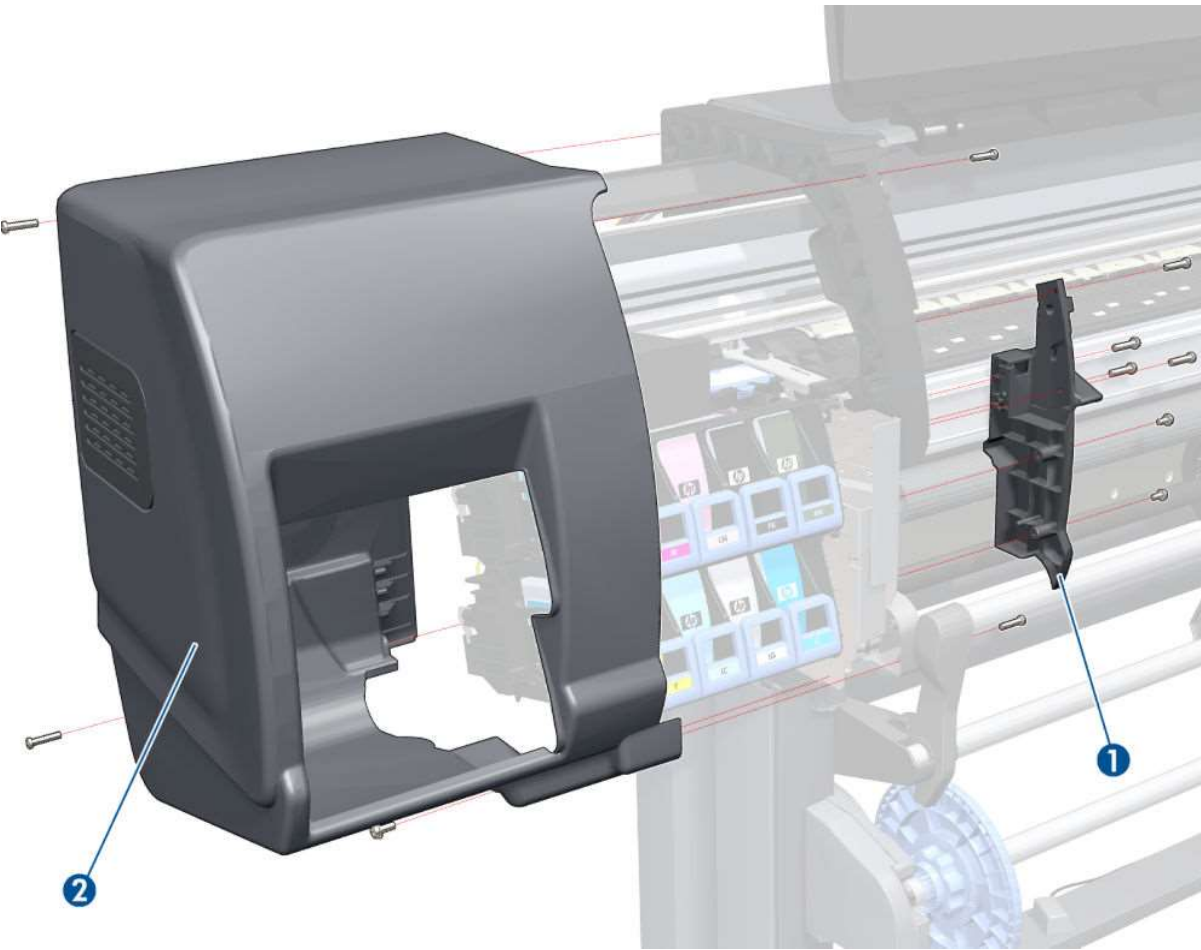


Right-Hand Assemblies

Number in figure	HP part number	Description	Model	Cross-reference
1	Q1273-60086	Right Scan-Axis Bracket	All	-
2	CQ109-67021	Service Station Assembly and Cable (includes Aerosol Fan)	All	Service Station on page 272
3	CQ109-67017	Primer Valves and Primer Tubes Assembly	All	Primer Valves on page 269
4	Q1273-60084	Aerosol Filter	All	Aerosol Fan and Filter on page 281
5	CQ109-67003	Aerosol Fan Assembly	All	Aerosol Fan and Filter on page 281
6	CQ109-67007	Service Station Cable (Includes Maintenance Cartridge Door Sensor)	All	Service Station on page 272
7	CQ109-67022	Vacuum Fan Assembly	All	Vacuum Fan on page 277
8	Q1273-60236	Drop Detector	All	Drop Detector on page 283
9	CQ109-67016	Primer Assembly	All	Primer Assembly on page 266

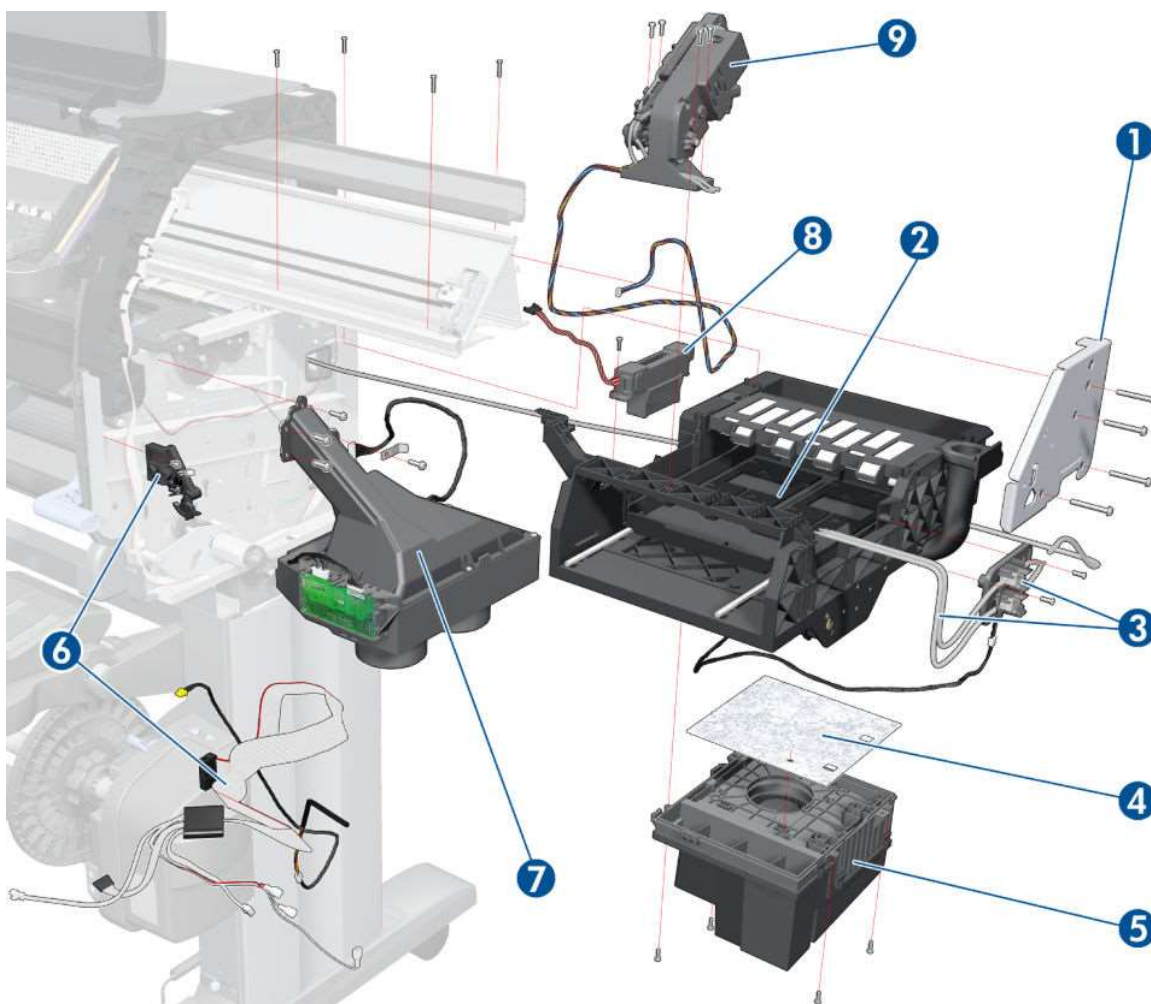


Left-Hand Assemblies

Number in figure	HP part number	Description	Model	Cross-reference
1	CQ109-67032	Cartridge Trays	Z6200	Cartridge Tray on page 398
	F2S71-67007		Z6600	
	F2S72-67003		Z6800	
	2QU13-67006		Z6610	
	2QU14-67014		Z6810	
2	CQ109-67024	Lower Ink Supply Station (without APS Assembly but including Cartridge Tray)	Z6200	Ink Supply Station (ISS) on page 297
	F2S71-67006		Z6600	
	F2S72-67002		Z6800	
	2QU13-67005		Z6610	
	2QU14-67013		Z6610	
3	CQ109-67023	Upper Ink Supply Station (without APS Assembly but including Cartridge Tray)	Z6200/ Z6800	Ink Supply Station (ISS) on page 297
	F2S71-67005		Z6600	
	2QU13-67004		Z6610	
	2QU14-67006		Z6810	
4	Q6651-60315	Left Scan-Axis Bracket	All	N/A
5	Q6651-60325	Left Spittoon	All	Left Spittoon on page 310
6	Q1273-60245	ISS to Cartridge Cable	All	N/A
7	CQ109-67027	APS Assembly with Pump, Holder and Relief Valve	42-inch	APS Assembly on page 304
	CQ111-67002		60-inch	
8	CQ109-67018	Embedded SpectroPhotometer (ESP) Actuator	42-inch	Embedded SpectroPhotometer (ESP) Actuator on page 383
	CQ111-67009		60-inch	
9	Q6651-60326	Blanking Plate (Spittoon)	All	Encoder Strip and Encoder Sensor on page 314

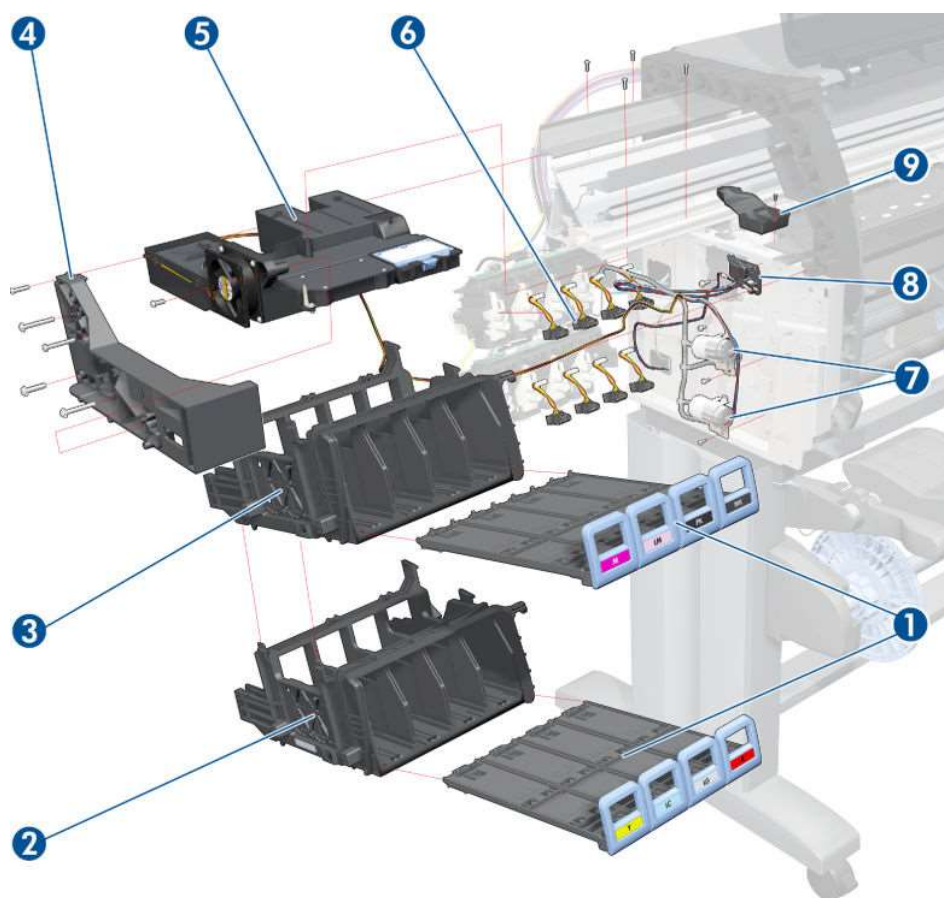


Carriage

Number in figure	HP part number	Description	Model	Cross-reference
1	CQ105-60130	Line Sensor Assembly with Holder and Cable	All	Line Sensor Assembly on page 378
2	Q6651-60051	Encoder Sensor (includes Encoder Strip)	42-inch	Encoder Strip and Encoder Sensor on page 314
	Q6652-60148		60-inch	
3	CQ109-67011	Carriage Assembly with Encoder Sensor, without PCA and ESP	Z6200/68x0	Carriage Assembly on page 322
	F2S71-67002		Z66x0	
4	Q6651-60039	Embedded SpectroPhotometer (ESP)	All	Embedded SpectroPhotometer (ESP) on page 380
5	Q6651-60341	Carriage Stopper (includes Carriage Stopper Screw and Media-Axis Motor Bracket)	All	Carriage Assembly on page 322
6	CH955-67007	Cutter Assembly	All	Cutter Assembly on page 296
7	Q6651-60335	Setup Printhead Kit	All	N/A
8	Q6651-60337	Carriage Flex Cables	All	Carriage Flex Cables on page 320
9	CQ109-67034	Carriage PCA	All	Carriage PCA on page 317

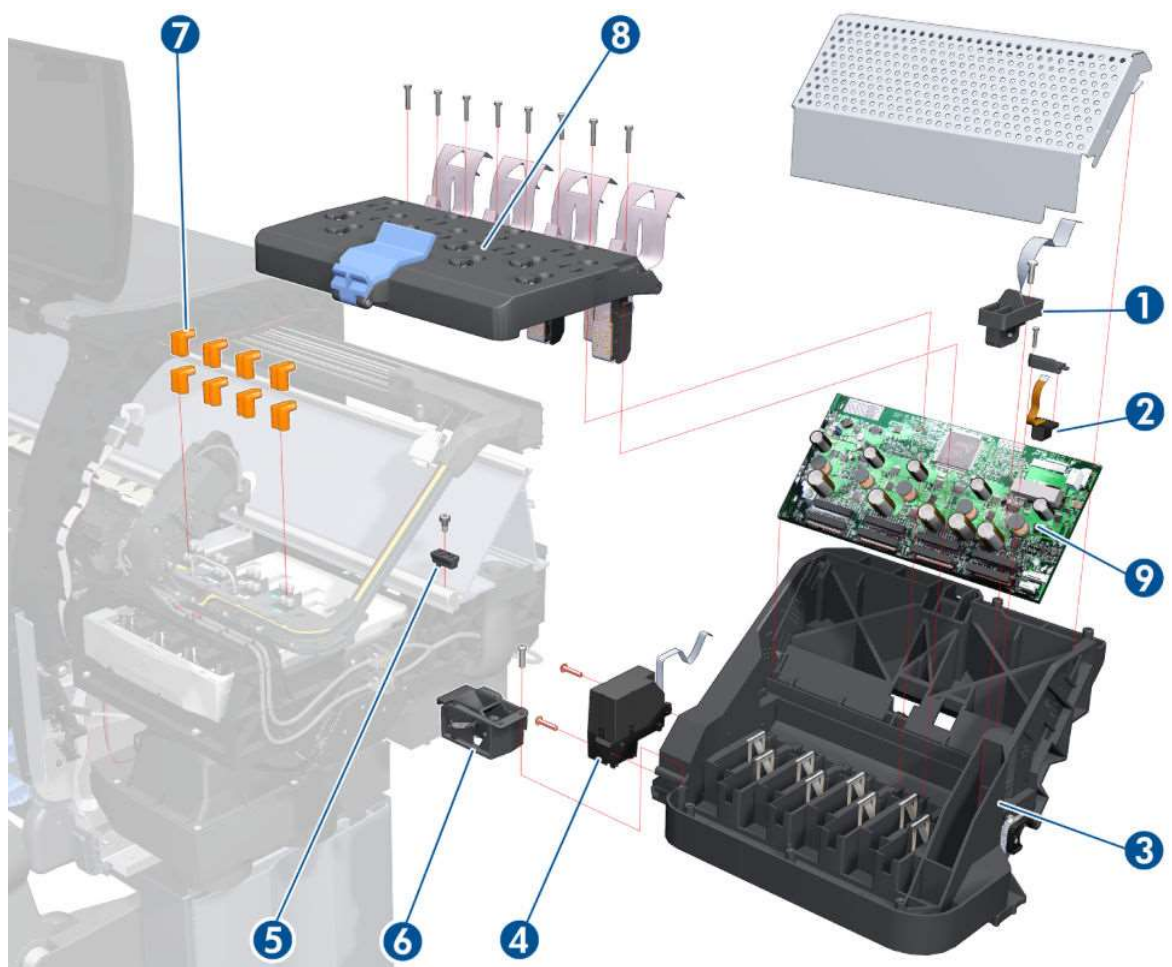


Scan-Axis Assemblies

Number in figure	HP part number	Description	Model	Cross-reference
1	Q6651-60051	Encoder Strip and Encoder Sensor Kit	42-inch	Encoder Strip and Encoder Sensor on page 314
	Q6652-60148		60-inch	
2	CQ109-67001	Scan-Axis Motor	42-inch	Scan-Axis Motor on page 330
	Q6652-60128		60-inch	
3	CQ109-67025	Ink Supply Tubes and Trailing Cable (includes setup printhead kit)	Z6200 42-inch	Ink Supply Tubes and Trailing Cable on page 286
	CQ111-67001		Z6200 60-inch	
	F2S71-67008		Z6600	
	F2S72-67004		Z6800	
	2QU12-67003		Z6810 42-inch	
	2QU14-67011		Z6810 60-inch	
	2QU13-67009		Z6610	
4	Q6651-60334	Ink Supply Tubes Clips	42-inch	Ink Supply Tubes and Trailing Cable on page 286
	Q6652-60125		60-inch	
5	Q6651-60336	Rear Tube Shelf and Brackets	42-inch	Ink Supply Tubes and Trailing Cable on page 286
	Q6652-60126		60-inch	
6	CQ109-67004	Belt and Tensioner Assembly	42-inch	Belt Assembly on page 329
	CQ111-67003		60-inch	

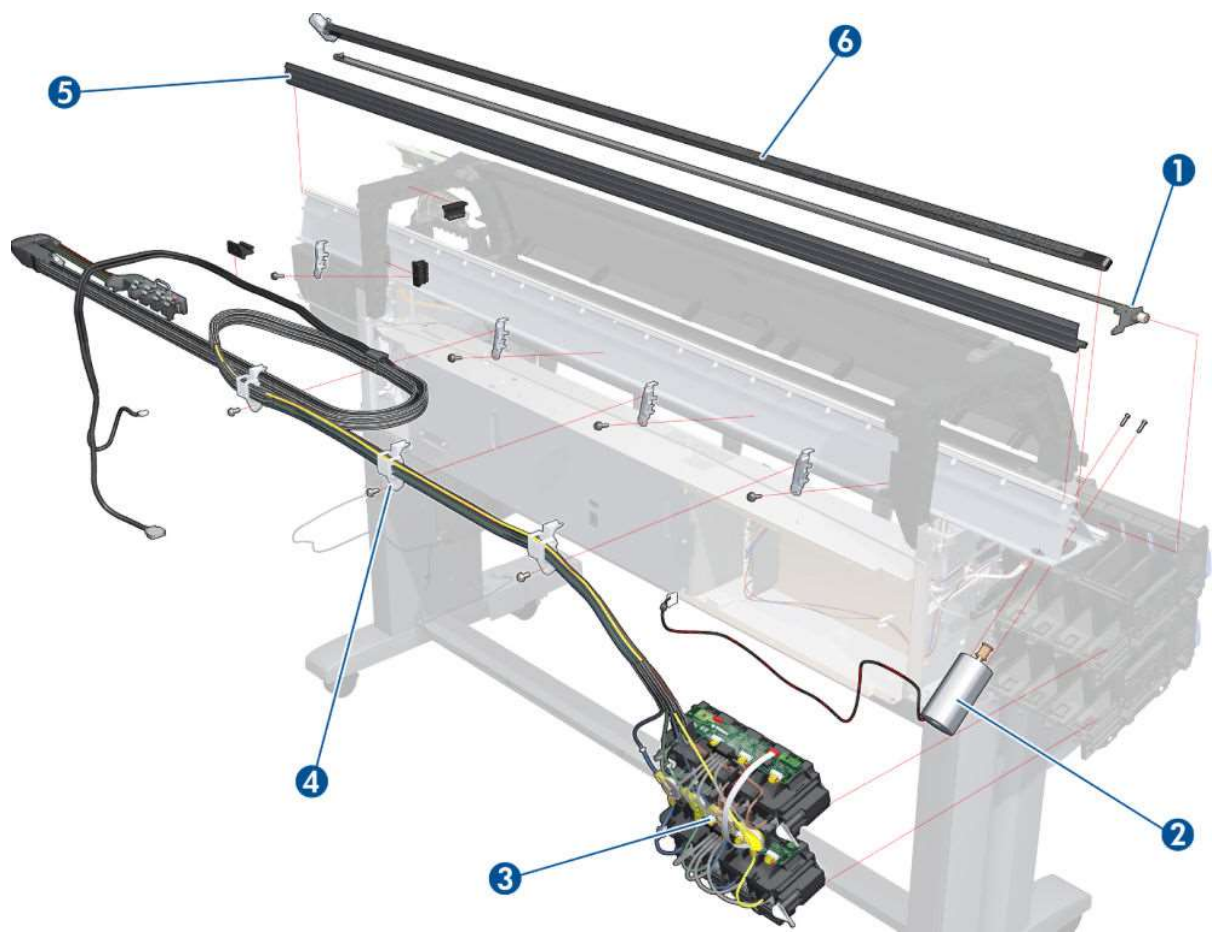


Drive Roller and Media-Axis Motor

Number in figure	HP part number	Description	Model	Cross-reference
1	Q6651-60320	Drive Roller Encoder Kit	42-inch	Scan-Axis Motor on page 330
	Q6652-60123		60-inch	
2	Q1273-60242	Drive Roller Gears and Drive Roller Brake Kit	All	Drive Roller on page 425
3	Q1273-60039	Drive Roller	42-inch	Drive Roller on page 425
	Q6652-60109		60-inch	
4	Q1273-60247	Media Advance Drive Motor, Drive Mount and Cable	42-inch	Media-Axis Motor on page 335
	Q6652-60108		60-inch	

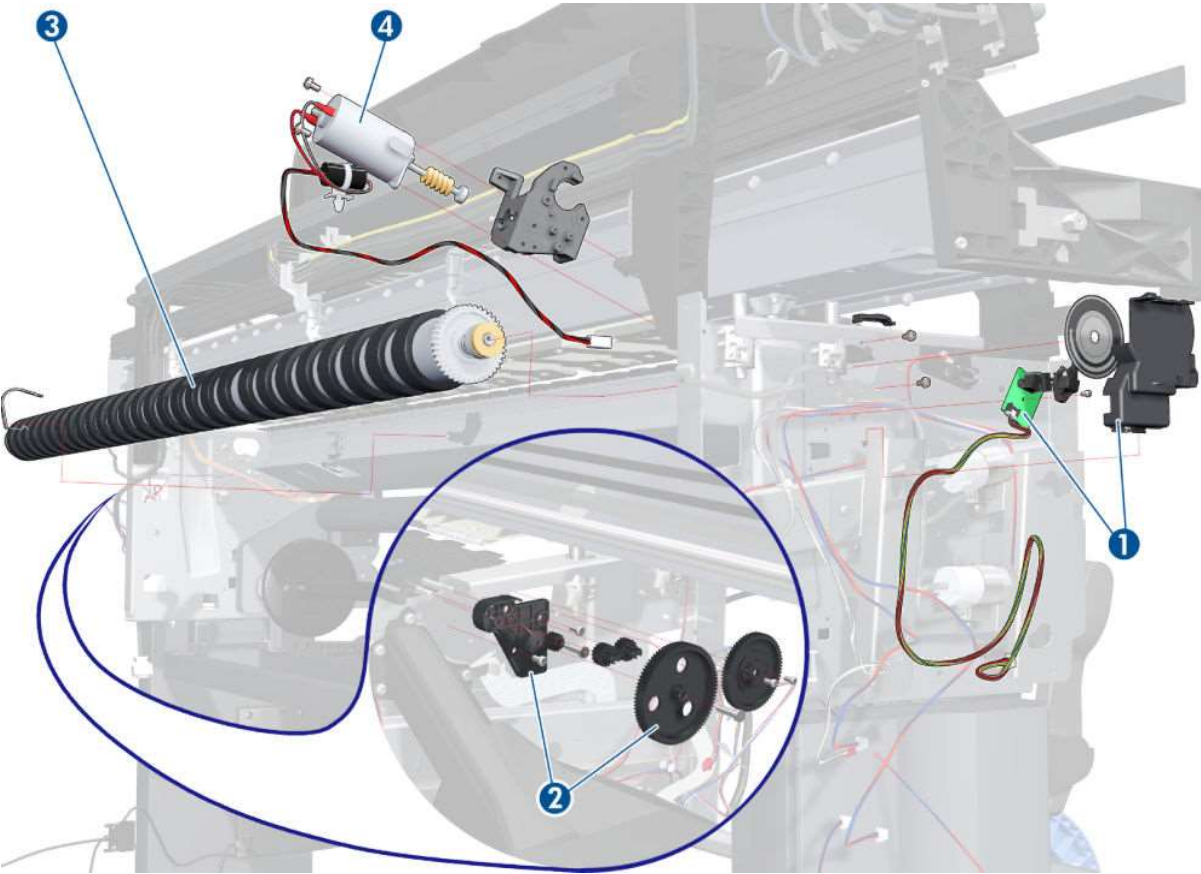


Paper Path Assemblies

Number in figure	HP part number	Description	Model	Cross-reference
1	Q6651-60281	Print Platen with Attachment Screw Retainer	42-inch	Print Platen on page 387
	Q6652-60111		60-inch	
2	Q6651-60295	Front Platen	42-inch	Output Platen on page 386
	Q6652-60115		60-inch	
3	Q6652-60120	Media Deflector	All	Media Deflector on page 385
4	Q1273-60103	Input Roller Lever	All	Input Roller on page 400
5	Q1273-60058	Input Roller	42-inch	Input Roller on page 400
	Q6652-60114		60-inch	
6	Q6651-60270	OMAS Module	All	Optical Media Advance Sensor (OMAS) on page 338
7	Q6651-60269	OMAS Cable	All	OMAS Cable on page 351
	CQ109-67042	HP Coated roll	All	

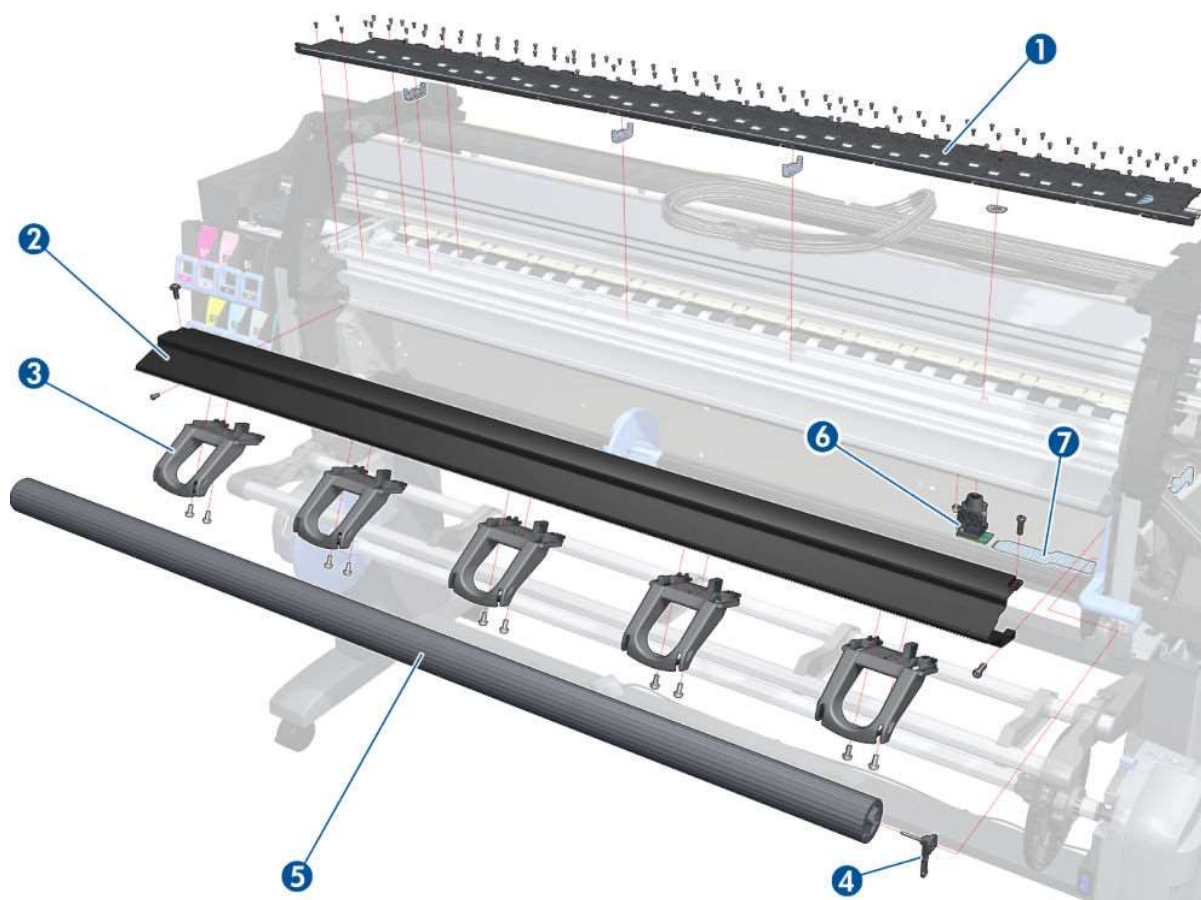


Center Guide and Pinchwheel Assembly

Number in figure	HP part number	Description	Model	Cross-reference
1	CH955-67122	Complete Pinchwheel Assembly with Media Sensor	42-inch	Pinchwheel Assembly on page 416
	CH956-67047		60-inch	
2	Q6651-60345	Center Guide	42-inch	Center Guide on page 421
	Q6652-60130		60-inch	
3	Q1273-60079	Media Sensor	All	Media Sensor on page 403
4	Q6651-60319	Media Lever Assembly	All	Media Lever on page 409
5	CQ109-67002	Media Lever Sensor	All	Media Lever Sensor on page 412
6	Q6651-60066	Pinchwheel Kit	All	Pinchwheel Assembly on page 416

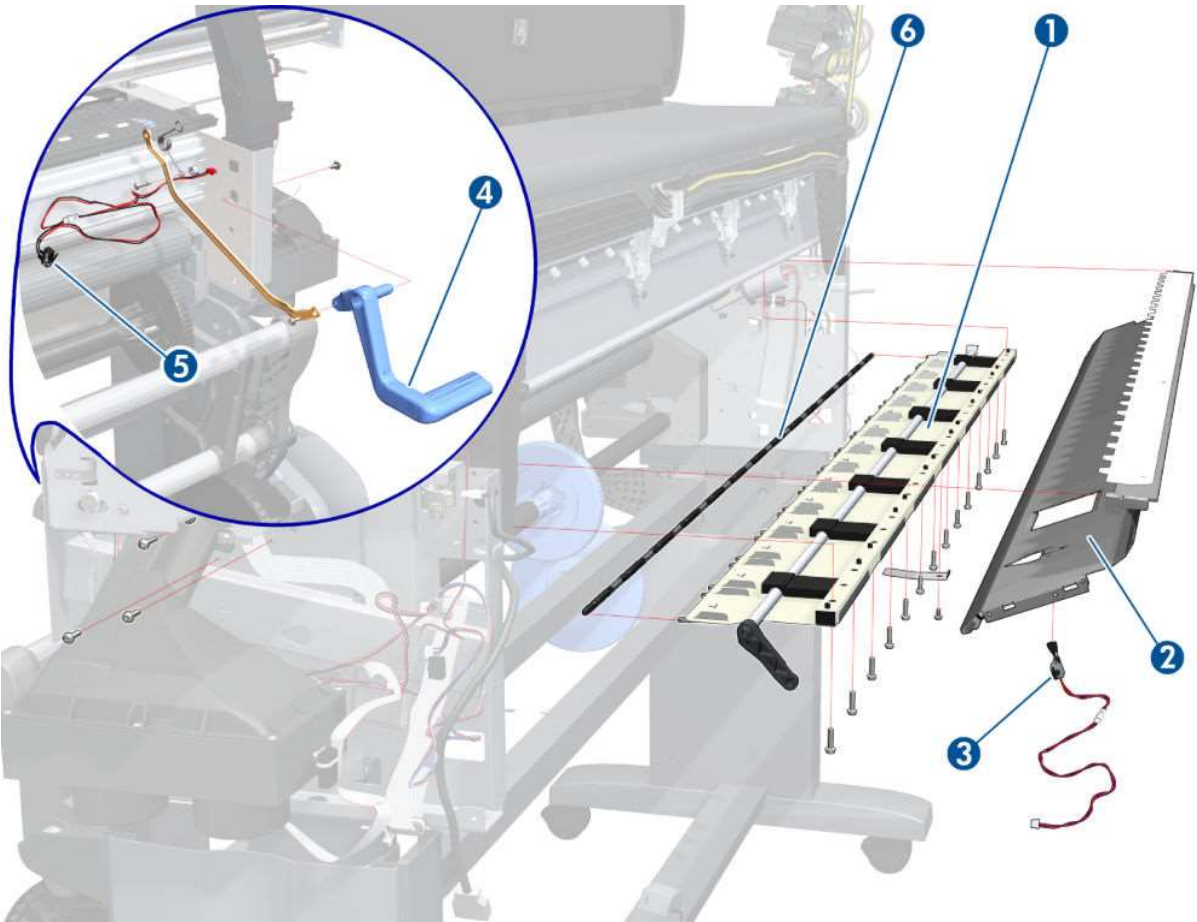


Media Entry Assemblies

Number in figure	HP part number	Description	Model	Cross-reference
1	CH955-67040	Right Roll-feed Module Assembly and Rewinder components	All	Right Roll-feed Module on page 433
2	CQ109-67009	Spindle	42-inch	N/A
	CQ111-67006		60-inch	
3	Q6675-60093	3-inch Spindle Adaptor	All	N/A
4	Q6651-60274	Spindle Hub	All	N/A
5	Q1273-60274	Left Roll-feed Module Assembly	All	Left Roll-feed Module on page 434
6	CQ109-67037	Khan Rewinder and Gear Serv	All	

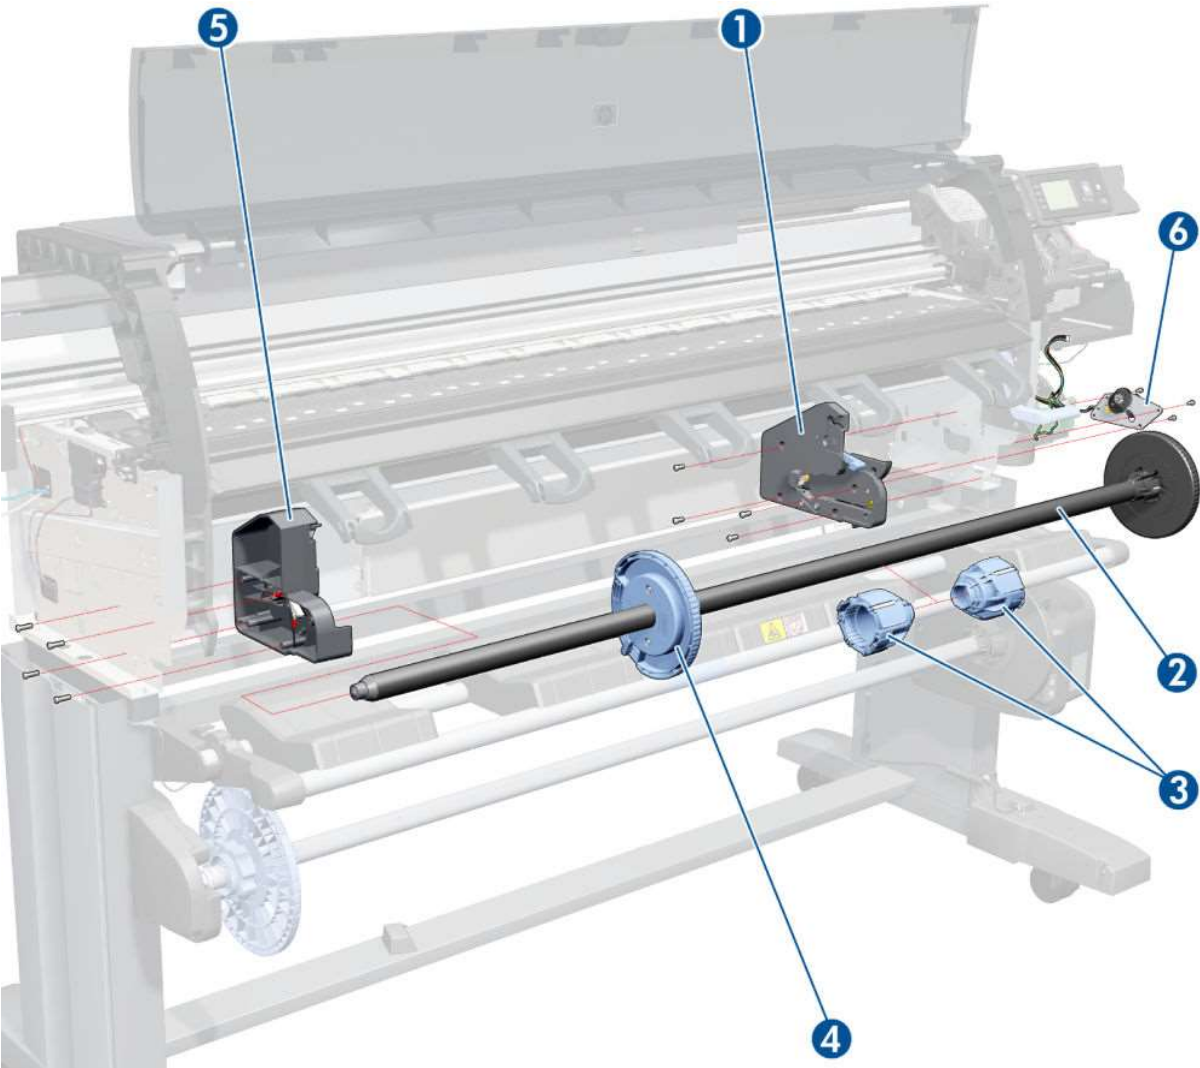

Take-Up Reel assembly

Number in figure	HP part number	Description	Model	Cross-reference
1	Q6706-60902	Take-Up Reel Deflector Support Assembly	All	Right Roll-feed Module on page 433
2	CQ109-67036	Take-Up Reel Motor	All	Take-Up Reel Motor on page 436
3	Q6706-60910	Thumbscrew	All	Take-Up Reel Sensors on page 441
4	CH955-67118	Take-Up Reel Receiver Sensor Housing Assembly	All	Take-Up Reel Sensors on page 441
5	CH955-67117	Take-Up Reel Sensors Assembly	All	Take-Up Reel Sensors on page 441
6	CH955-67033	Take-Up Reel Spindle Assembly with Tubes, but not Spindle Hubs	42-inch	N/A
	CH956-67012		60-inch	
7	CH955-67082	Take-Up Reel Shelf	42-inch	Take-Up Reel Deflector Supports on page 439
	CH956-67032		60-inch	
8	Q6706-60906	Take-Up Reel Tubes Assembly	42-inch	N/A
	Q6652-60902		60-inch	
9	Q6706-60901	Take-Up Reel Spindle Hubs	All	N/A
10	Q6706-60903	Take-Up Reel Left-hand Module	All	

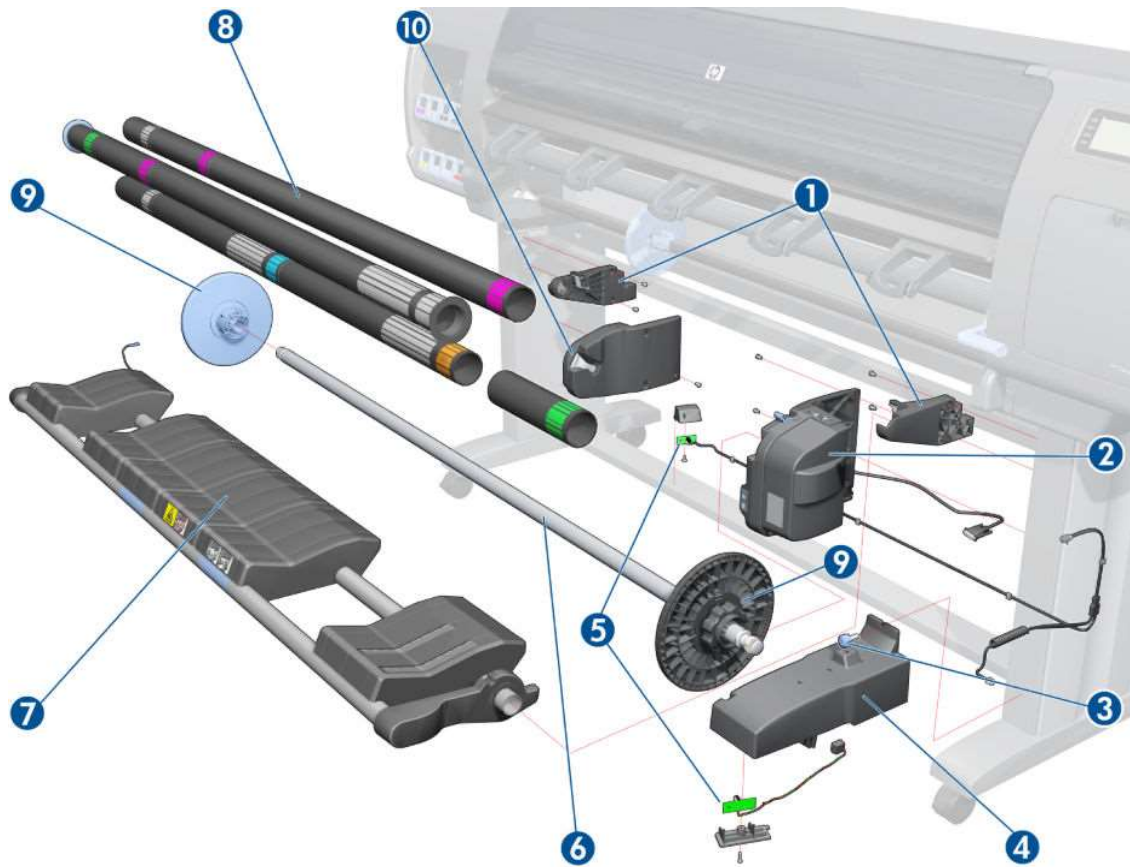

Miscellaneous parts

HP part number	Description	Model	Cross-reference
Q1273-60097	Right Arc	All	
Q1273-60098	Left Arc	All	
Q6715A	User's Maintenance/cleaning kit ^a	All	N/A
CQ109-67010	Preventive Maintenance Kit # 1: - Scan-Axis Motor (see Scan-Axis Assemblies on page 213) - Encoder Strip (see Scan-Axis Assemblies on page 213) - Belt Assembly (see Scan-Axis Assemblies on page 213) - Carriage Assembly without PCA, Cutter, and ESP	Z6200 (42-inch)	
CQ111-67007		Z6200 (60-inch)	
F2S71-67009		Z6600	
F2S72-67005		Z6800	N/A
2QU12-67001		Z6810 42-inch	
2QU14-67001		Z6810 60-inch	
2QU13-67001		Z6610	
	Preventive Maintenance Kit # 2:		
	- Aerosol Filter (see Service Station on page 272) - Service Station Aerosol Assembly (see Service Station on page 272) - Ink Absorber (see User's Guide)		
CQ109-67019	- Left spittoon (see Left Spittoon on page 310) - ESP (see Embedded SpectroPhotometer (ESP) on page 380) - Line Sensor (see Line Sensor Assembly on page 378) - Encoder Strip (see Scan-Axis Assemblies on page 213)	All	N/A
CQ533-60001	Power Cord Kit for Europe (EU, Switzerland, Middle East, South Africa)	All	N/A
CQ533-60002	Power Cord Kit for America (USA, Canada, Mexico, Argentina, Brazil, Chile)	All	N/A
CQ533-60003	Power Cord Kit for Asia (Singapore, Hong Kong, India, Thailand, Philippines, Vietnam, Cambodia, Korea, Indonesia, Japan, China, Taiwan, Australia, New Zealand)	All	N/A
	CPU Fan	All	N/A
	Jumper Cord for Chile, Uruguay, Argentina	All	N/A
CQ871-90022	Air Tubes Kit	All	N/A

a. This accessory is available to be purchased by the customer. In case of warranty replacement you can use part number Q6651-60276